

WARNINGS


- Do not mount accessories in front of or near the path of airbag deployment.
- Check vehicle compatibility before install to avoid damage to the vehicle mount point.
- Designed to work with OEM dashboard only, not compatible with aftermarket modifications.
- Do not use with 3rd party extension arms. Adhere to our phone weight limits.
- Mount electronics away from airflow to prevent heat damage.

Self-installation instructions and advice are provided for your convenience. It is your responsibility to determine if you have the knowledge, skills, and physical ability required to properly perform on installation. Offroad shall have no liability for damage or injury resulting from the installation or use of any Offroad or third party products. It is your responsibility to ensure all products are installed in accordance with local laws and regulations and in such a manner as to allow a vehicle to be operated safely and without distraction. Offroad product warranties do not cover the installation, removal or re-installation of any product.

01

Using the L-key provided, slightly loosen the screw to ensure the inside base plate moves freely.


Do not fully remove the screw - keep about one thread engaged.

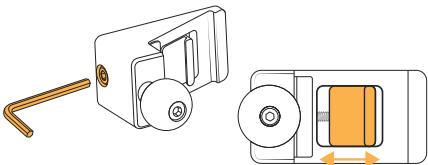

03

Keep outward tension on the mount.

Using the L-key, tighten the screw until the mounting base is drawn inward to the touch screen bezel and firmly attached.




NOTE

TOP VIEW

Rests on back of screen


SCREEN

Inside plate hook into first slot




02

Hook the inside base plate lip into the first slot behind the screen.

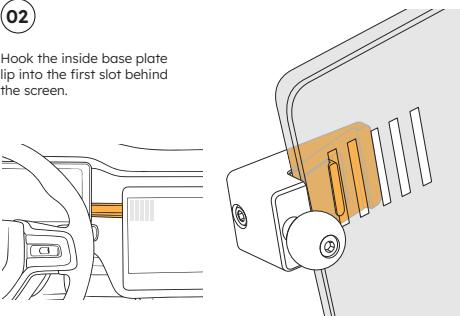

POSITIONING

Fits on both sides of the touch screen as shown.

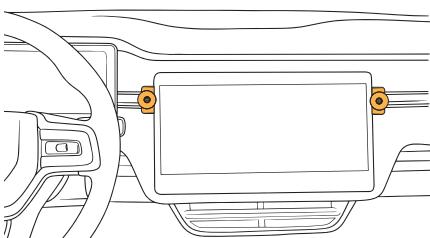

WATCH THIS INSTALL

